6EY33LW





SPECIFICATIONS

	MODEL	6EY33LW			
Frequency		50Hz	60Hz		
	Rated Output (kWe)	3	3100		
	Туре	3-Phas	3-Phase Brushless		
Generator	Voltage (V)	~	~6600		
	No. of Poles (P)	8	10		
	Power Factor (%)	80(10	80(lagging)		
	Rated Output (kW(HP))	3360			
	Туре	Vertical, Watar-cooled, 4-stroke Diesel			
Diesel Engine	No. of Cylinders		6		
	Bore×Stroke (mm)	330×440			
	Rated Speed (min-1)	750	720		
Total Weight(Gen.Set) (kg)		65	63400		

- The rated output is based on the "Prime Power"rating.
 The rated output of generator is based on the bylaw of generator efficiency in JEM1355.
- The dry weight value is for reference only. The value can very depending on the generator manufacturer, equipment specifications, accessories, etc.
- Specifications are subject to change without notice for incorporation of improvements.

DIMENSIONS



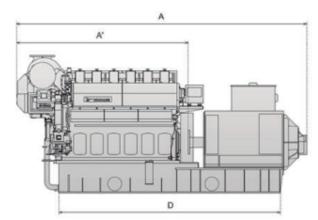

G: Minimum height for removing piston

MODEL	Α	\mathbf{A}^1	В	С	D	E	F	G
6EY33LW	8950	5280	2355	3895	7130	1780	1370	3742



6EY26LW




SPECIFICATIONS

	MODEL	6EY	6EY26LW		
Frequency		50Hz	60Hz		
	Rated Output (kWe)	1	1720		
	Туре	3-Phase	3-Phase Brushless		
Generator	Voltage (V)	3000	3000~6600		
	No. of Poles (P)	8	10		
	Power Factor (%)	80(10	80(lagging)		
	Rated Output (kW(HP))	184	1840(2467)		
	Туре	Vertical, Watar-co	Vertical, Watar-cooled, 4-stroke Diesel		
Diesel Engine	No. of Cylinders		6		
-	Bore×Stroke (mm)	260	260×385		
	Rated Speed (min-1)	750	720		
Total Weight(Gen.Set) (kg)		30	30600		


- The rated output is based on the "Prime Power"rating.
 The rated output of generator is based on the bylaw of generator efficiency in JEM1355.
- The dry weight value is for reference only. The value can very depending on the generator manufacturer, equipment specifications, accessories, etc.
- Specifications are subject to change without notice for incorporation of improvements.

DIMENSIONS

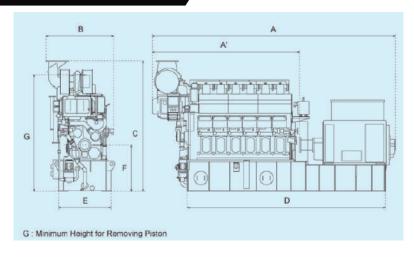



8EY26LW

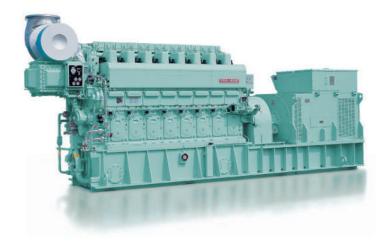


SPECIFICATIONS

	MODEL	8EY26LW			
Frequency		50Hz	60Hz		
	Rated Output (kWe)	23	2300		
	Туре	3-Phase	3-Phase Brushless		
Generator	Voltage (V)	3000-	3000~6600		
	No. of Poles (P)	8	10		
	Power Factor (%)	80(lagging)			
	Rated Output (kW(HP))	2450(3286)			
Diesel Engine	Туре	Vertical, Watar-cooled, 4-stroke Diesel			
	No. of Cylinders	6			
	Bore×Stroke (mm)	260	260×385		
	Rated Speed (min-1)	750	720		
Total Weight(Gen.Set) (kg)		45000			

- The rated output is based on the "Prime Power"rating.
 The rated output of generator is based on the bylaw of generator efficiency in JEM1355.
- The dry weight value is for reference only. The value can very depending on the generator manufacturer, equipment specifications, accessories, etc.
- Specifications are subject to change without notice for incorporation of improvements.

DIMENSIONS

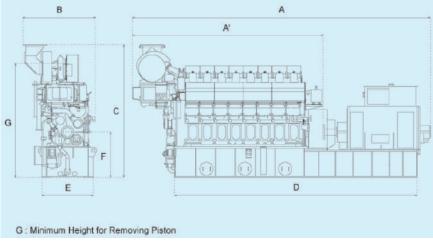



6EY18ALW




SPECIFICATIONS

	MODEL	6EY	6EY18ALW		
Frequency		50Hz	60Hz		
	Rated Output (kWe)	7	750		
	Туре	3-Phase	3-Phase Brushless		
Generator	Voltage (V)	200	200~6600		
	No. of Poles (P)	6	8		
	Power Factor (%)	80(10	80(lagging)		
	Rated Output (kW(HP))	800	800(1073)		
	Туре	Vertical, Watar-co	Vertical, Watar-cooled, 4-stroke Diesel		
Diesel Engine	No. of Cylinders		6		
	Bore×Stroke (mm)	180	180×280		
	Rated Speed (min-1)	1000	900		
Total Weight(Gen.Set) (kg)		12	12100		

- The rated output is based on the "Prime Power"rating.
 The rated output of generator is based on the bylaw of generator efficiency in JEM1355.
- The dry weight value is for reference only. The value can very depending on the generator manufacturer, equipment specifications, accessories, etc.
- Specifications are subject to change without notice for incorporation of improvements.

DIMENSIONS

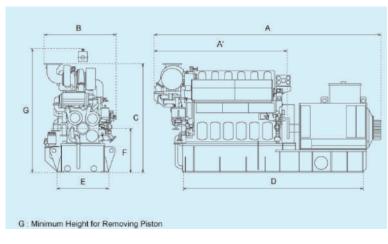



6EY22ALW




SPECIFICATIONS

	MODEL	6EY22ALW			
Frequency		50Hz	60Hz		
	Rated Output (kWe)	12	1250		
	Туре	3-Phase	3-Phase Brushless		
Generator	Voltage (V)	200	200~6600		
	No. of Poles (P)	6	8		
	Power Factor (%)	80(la	80(lagging)		
	Rated Output (kW(HP))	1370(1863)			
	Туре	Vertical, Watar-cooled, 4-stroke Diesel			
Diesel Engine	No. of Cylinders	6			
	Bore×Stroke (mm)	220×320			
	Rated Speed (min-1)	1000	900		
Total Weight(Gen.Set) (kg)		18100			

- The rated output is based on the "Prime Power"rating.
 The rated output of generator is based on the bylaw of generator efficiency in JEM1355.
- The dry weight value is for reference only. The value can very depending on the generator manufacturer, equipment specifications, accessories, etc.
- Specifications are subject to change without notice for incorporation of improvements.

DIMENSIONS

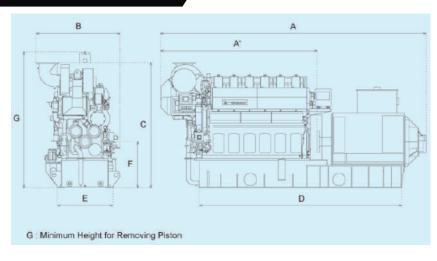



AY20L-ET



SPECIFICATIONS

	MODEL	AY2	AY20L-ET		
Frequency		50Hz	60Hz		
	Rated Output (kWe)	500	520		
	Туре	3-Phase	3-Phase Brushless		
Generator	Voltage (V)	200	200~6600		
	No. of Poles (P)		4		
	Power Factor (%)	80(la	80(lagging)		
	Rated Output (kW(HP))	544(730)	565(758)		
	Туре	Vertical, Watar-co	Vertical, Watar-cooled, 4-stroke Diesel		
Diesel Engine	No. of Cylinders		6		
	Bore×Stroke (mm)	155	155×180		
	Rated Speed (min-1)	1500	1800		
Total Weight(Gen.Set) (kg)		47	4750		

- The rated output is based on the "Prime Power"rating.
 The rated output of generator is based on the bylaw of generator efficiency in JEM1355.
- The dry weight value is for reference only. The value can very depending on the generator manufacturer, equipment specifications, accessories, etc.
- Specifications are subject to change without notice for incorporation of improvements.

DIMENSIONS

